ORDER NO. AD9604092C2

Service Manual

Amplifier

Amplifier

SE-CH540

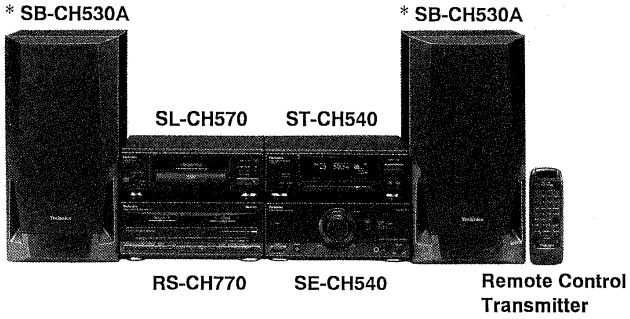

Colour

(K) : Black

Areas

Suffix for Model No.	Area	Colour
(E), (EP)	Europe	(K)
(EB)	Britain	
(EG)	Germany and Italy	

Because of unique interconnecting cables, when a component requires service, send or bring in the entire system.

System: SC-CH540

Specifications

Power output

DIN 1 kHz, THD 1%, both channels driven
2×35 W (6 Ω)

RMS 1 kHz, THD 10%, both channels driven
2×48 W (6 Ω)

Total harmonic distortion

Rated power at 1 kHz 1% (6 Ω)

Half power at 1 kHz 0.09% (6 Ω)

Load impedance 6 Ω – 8 Ω

S/N (rated power) 90 dB

■ General

Power consumption 114 W

Power supply

[For (E), (EG) and (EP) areas] 230 V, AC 50/60 Hz

[For (EB) area] 230 – 240 V, AC 50/60 Hz

Dimensions (W×H×D) 270×118.5×341.5 mm

Weight 3.9 kg

Notes:

Specifications are subject to change without notice.
Weight and dimensions are approximate.
Total harmonic distortion is measured by the digital spectrum analyzer.

System	Tuner/sound processor	Compact disc player	Amplifier	Cassette deck	Speakers
SC-CH540	ST-CH540	SL-CH570	**SE-CH540**	RS-CH770	*SB-CH530A

*: Made in PAES

⚠WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product.
Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

Technics®

© 1996 Matsushita Electric Industrial Co., Ltd. All rights reserved. Unauthorized copying and distribution is a violation of law.

■ Contents

	Page
Before Repair	2
Protection Circuitry	2
Accessories	2
Caution of AC Mains Lead	3
Location of Controls	3
Installation	4
Flat Cable Connections	4
Antenna Connections	5
External Unit Connection	5
Optional Antenna Connections	6
Connection of AC Power Supply Cord	6

	Page
Operation Check and Main Component Replacement Procedures	7, 8
Power Source ON/OFF of This Unit	9
Schematic Diagram	9~11
Printed Circuit Board Diagram	12~14
Wiring Connection Diagram	14
Block Diagram	15
Replacement Parts List	16~18
Cabinet Parts Location	19
Packaging	20

■ Before Repair

(1) Turn off the power supply. Using a 10 Ω, 10 W resistor, connect both ends of power supply capacitors (C701, C702) in order to discharge the voltage.
(2) Before turning the power supply on, after completion of repair, slowly apply the primary voltage by using a power supply voltage controller to make sure that the consumed current at 50/60 Hz in NO SIGNAL mode should be shown below with respect to supply voltage 230 V/240 V.

Power supply voltage	AC 230 V	AC 240 V
Consumed current 50 Hz	60 ~ 200 mA	60 ~ 200 mA

■ Protection Circuitry

The protection circuitry may have operated if either of the following conditions is noticed:
＊No sound is heard when the power is switched ON.
＊Sound stops during a performance.
The functions of this circuitry is to prevent circuitry damage if, for example, the positive and negative speaker connection wires are "shorted", or if speaker systems with an impedance less than the indicated rated impedance of this unit are used.
If this occurs, follow the procedure outlined below:
1. Switch OFF the power.
2. Determine the cause of the problem and correct it.
3. Switch ON the power once again.

Note:
When the protection circuitry functions, the unit will not operate unless the power is first switched OFF and then ON again.

■ Accessories

- AC power supply cord
  (E), (EG) and (EP) areas : (RJA0019-2K) .. 1
  (EB) area : (RJA0049-K) 1


(E), (EG) and (EP)


(EB)

- Batteries
  (UM-4, "AAA", R03) 2
  Note: These are available on sales route.

- Mounting screw
  (XTN3+12AFZ) 1

- Power plug adaptor
  for (EB) area only (SJP9009) 1

- Flat cable
  Long (REX0661) 1
  Medium (REX0660) 1
  Short (REX0608) 1

- AM (LW/MW) loop antenna
  (RSA0012) 1



- FM indoor antenna
  (RSA0007) 1

- Remote control transmitter
  (RAK-CH204WH) 1



- Antenna holder
  (RMN0244) 1

- Speaker cords
  (REE0499) 2

■ Caution for AC Main Lead

[(EB) area code model only]

For your safety, please read the following text carefully.

This appliance is supplied with a moulded three pin mains plug for your safety and convenience.
A 5-ampere fuse is fitted in this plug.
Should the fuse need to be replaced please ensure that the replacement fuse has a rating of 5-ampere and that it is approved by ASTA or BSI to BS1362.
Check for the ASTA mark ◈ or the BSI mark ♡ on the body of the fuse.

If the plug contains a removable fuse cover you must ensure that it is refitted when the fuse is replaced.
If you lose the fuse cover the plug must not be used until a replacement cover is obtained.
A replacement fuse cover can be purchased from your local dealer.

CAUTION!
IF THE FITTED MOULDED PLUG IS UNSUITABLE FOR THE SOCKET OUTLET IN YOUR HOME THEN THE FUSE SHOULD BE REMOVED AND THE PLUG CUT OFF AND DISPOSED OF SAFETY.
THERE IS A DANGER OF SEVERE ELECTRICAL SHOCK IF THE CUT OFF PLUG IS INSERTED INTO ANY 13-AMPERE SOCKET.

If a new plug is to be fitted please observe the wiring code as shown below.
If in any doubt please consult a qualified electrician.

IMPORTANT

The wires in this mains lead are coloured in accordance with the following code:

Blue: Neutral
Brown: Live

As the colours of the wires in the mains lead of this appliance may not correspond with the coloured markings identifying the terminals in your plug, proceed as follows:
The wire which is coloured BLUE must be connected to the terminal in the plug which is marked with the letter N or coloured BLACK.

This apparatus was produced to BS 800.

The wire which is coloured BROWN must be connected to the terminal in the plug which is marked with the letter L or coloured RED.

Under no circumstances should either of these wires be connected to the earth terminal of the three pin plug, marked with the letter E or the Earth Symbol ⏚ .

Before use

Removal the connector cover as follows.

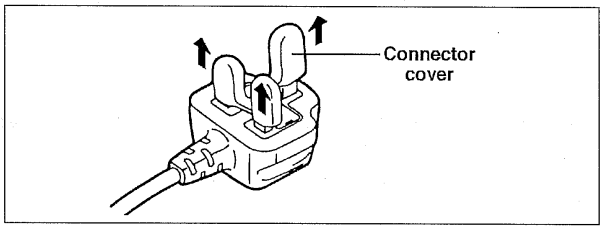

How to replace the fuse

1. Remove the fuse cover with a screwdriver.

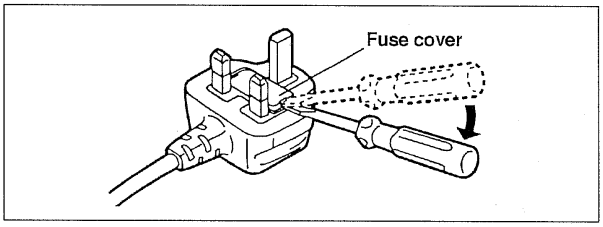

2. Replace the fuse and attach the fuse cover.

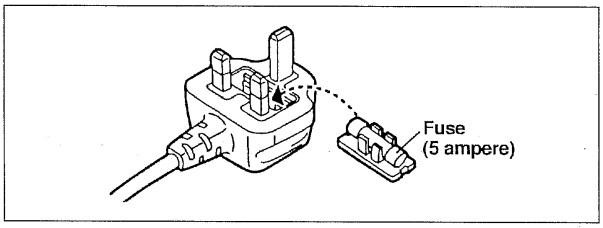

■ Location of Controls

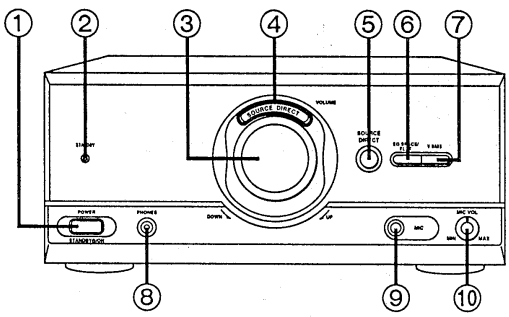

① Power "STANDBY ⏻/ON" switch (POWER, STANDBY ⏻/ON)
Press to switch the unit from on to standby mode or vice versa. In standby mode, the unit is still consuming a small amount of power.

② Standby indicator (STANDBY)
When the unit is connected to the AC mains supply, this indicator lights up in standby mode and goes out when the unit is turned on.

③ Volume control (VOLUME)
④ Source direct indicator (SOURCE DIRECT)
⑤ Source direct button (SOURCE DIRECT)
⑥ EQ SPACE/flat button (EQ SPACE/FLAT)
⑦ V. bass button (V. BASS)
⑧ Headphones jack (PHONES) (ϕ3.5, 32 Ω)
⑨ Microphone jack (MIC) (ϕ6.3, 600 Ω)
⑩ Microphone volume control (MIC VOL)

■ Installation

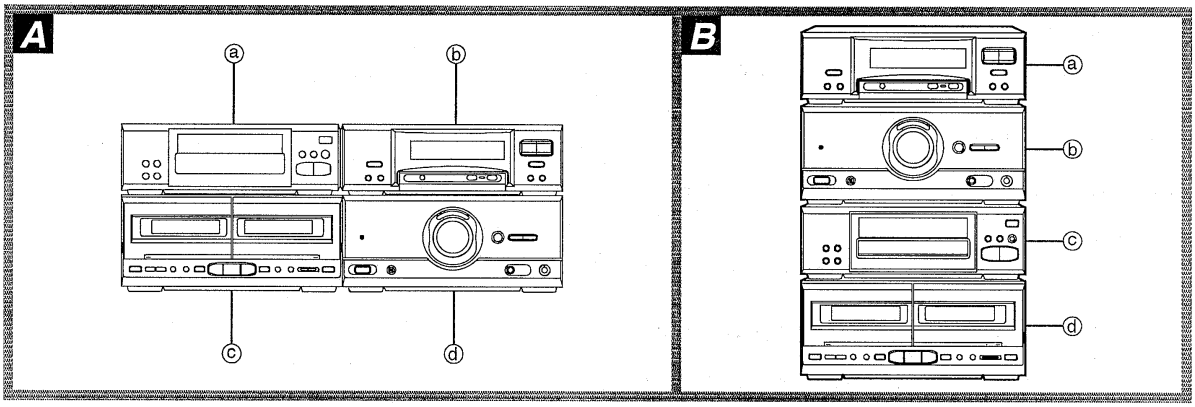

Stacking the components

Horizontal stacking A

ⓐ CD player
ⓑ Tuner/sound processor
ⓒ Cassette deck
ⓓ Amplifier

Vertical stacking B

ⓐ Tuner/sound processor
ⓑ Amplifier
ⓒ CD player
ⓓ Cassette deck

■ Flat Cable (included) Connections

Before marking connections:
Make sure the white line on the cable is on the right side.



To unplug cables:
Hold the connector from both ends.



Note **Do not try connecting or disconnecting the flat cables while the power is switched to ON.**

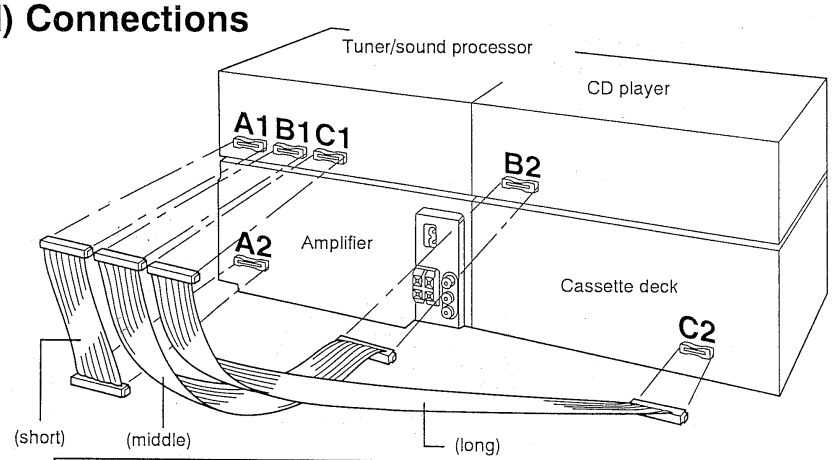

After connection:
Fold and press the cable as flat to the back of the unit as possible. (To minimize noise pickup while listening an MW/LW broadcast)

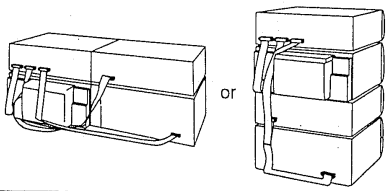

■ Antenna Connections

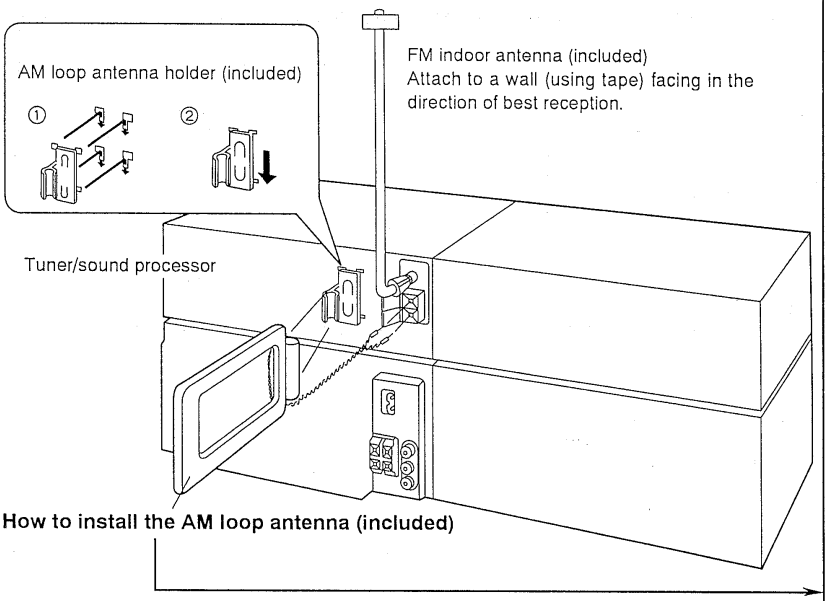
AM loop antenna holder (included)
①
②
FM indoor antenna (included)
Attach to a wall (using tape) facing in the direction of best reception.
Tuner/sound processor

How to install the AM loop antenna (included)

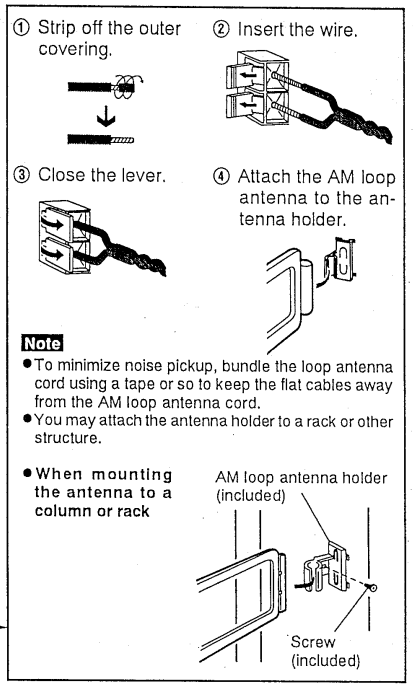
① Strip off the outer covering.
② Insert the wire.
③ Close the lever.
④ Attach the AM loop antenna to the antenna holder.
Note
• To minimize noise pickup, bundle the loop antenna cord using a tape or so to keep the flat cables away from the AM loop antenna cord.
• You may attach the antenna holder to a rack or other structure.
• When mounting the antenna to a column or rack
AM loop antenna holder (included)
Screw (included)

■ External Unit Connections

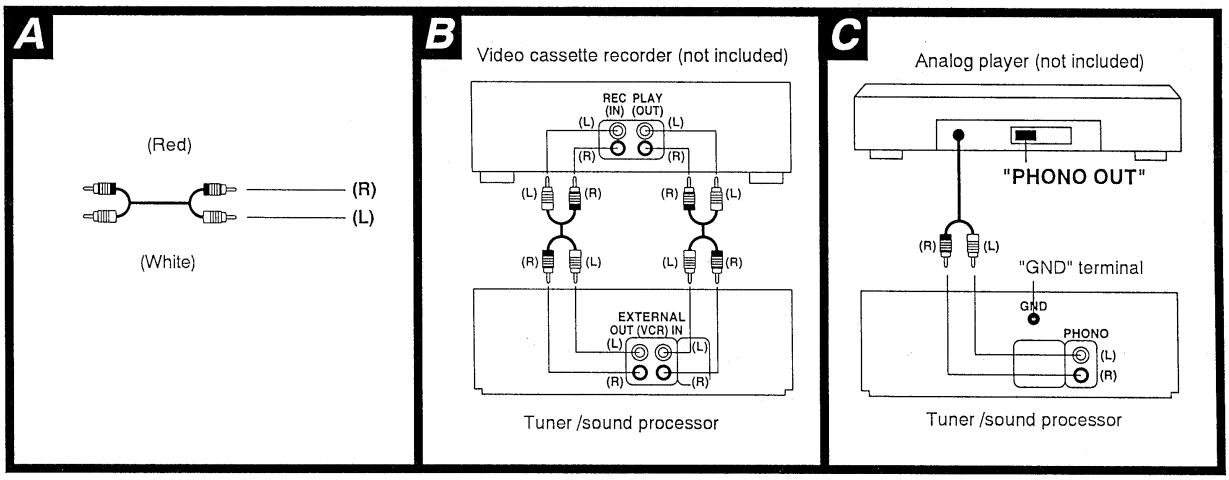

- Make sure that the power supply for all components has been turned off before making any connections.
- For details, refer to the operating instructions of the units which are to be connected.
- When units other than those described below are to be connected, please consult with your audio dealer.

Connecting the stereo connection cable (not included) A
Connect the red plug to the right (R) connector.
Connect the white plug to the left (L) connector.

Video cassette recorder **B**

Analog player **C**

This example shows how to connect the analog player with the PHONO OUT/LINE OUT switch.

Set the switch to the "PHONO OUT" position at the back of the analog player.
"GND" terminal is for a ground wire use.

■ Optional Antenna Connections

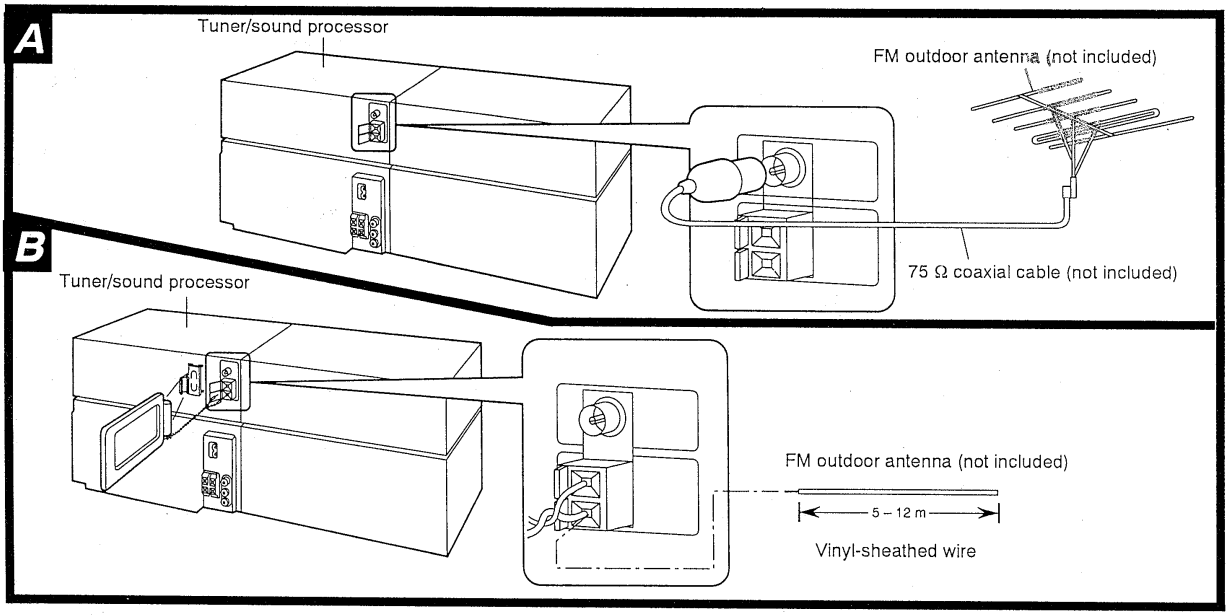

FM outdoor antenna (not included) A

The outdoor antenna should be used when using this unit in mountainous areas or in spaces enclosed by reinforced concrete where the FM indoor antenna (included) does not provide satisfactory reception.

Note
An outdoor antenna should be installed by a qualified technician only.

AM (MW/LW) outdoor antenna (not included) B

The outdoor antenna should be used when using this unit in mountainous areas or in spaces enclosed by reinforced concrete where the AM loop antenna (included) does not provide satisfactory reception.

Use 5–12 m of vinyl-sheathed wire horizontally at the window, or a convenient location.

When the unit is not in use, disconnect the outdoor antenna to prevent possible damage from lightning. Never use an outdoor antenna during an electrical storm.

Note
Be sure to connect the AM loop antenna even when an outdoor antenna is used.

■ Connection of AC Power Supply Cord

• Plug the cord into an outlet only after all other connections have been made.

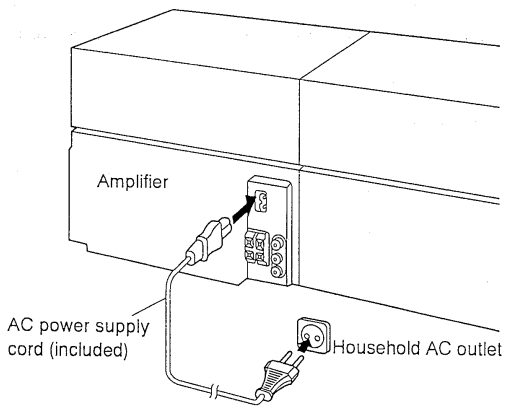

Insertion of Connector:

Even when the connector is perfectly inserted, depending on the type of inlet used, the front part of the connector may jut out as shown in the drawing.



■ Operation Check and Main Component Replacement Procedures

NOTE

1. **This section describes procedures for checking the operation of the major printed circuit boards and replacing the main components.**
2. **For reassembly after operation checks or replacement, reverse the respective procedures. Special reassembly procedures are described only when required.**
3. **Select items from the following index when checks or replacement are required.**
4. **Illustrated screws are equivalent to actual size.**
5. **Refer the parts No. on the page of "Main Component Replacement Procedures", if necessary.**

• Contents

•Checking Procedures for each P.C.B. Page.

1. Checking for the operation P.C.B.. ..... 7.
2. Checking for the main P.C.B.. ..... 8.

•Main Component Replacement Procedures

1. Replacement for the power IC and regulator transistor. ..... 8.

■ Checking Procedure for each P.C.B.

1. Checking for the operation P.C.B.

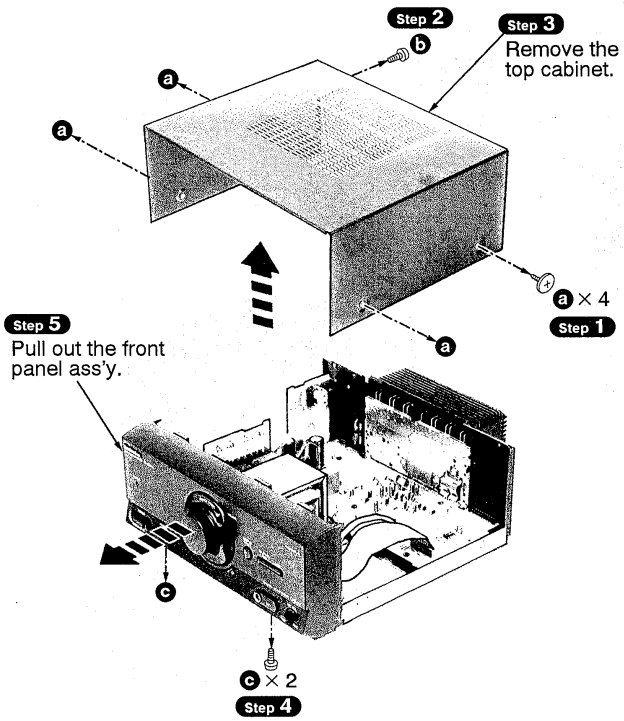

• **Check the operation P.C.B. as shown below.**

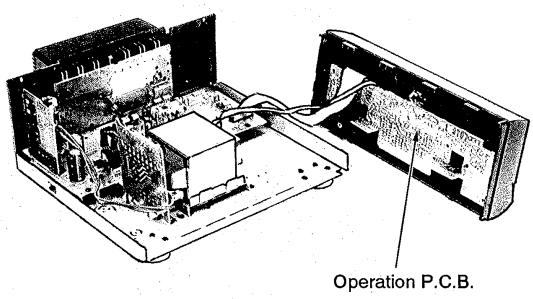

[RHD30007–K1] (Black)

[XTBS3+10JFZ1] (Black)

[XTBS3+8JFZ1] (Black)

2. Checking for the main P.C.B.

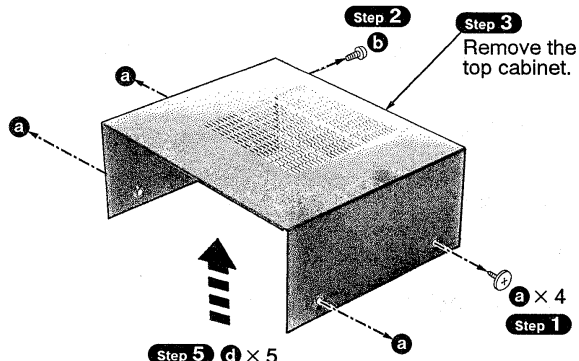

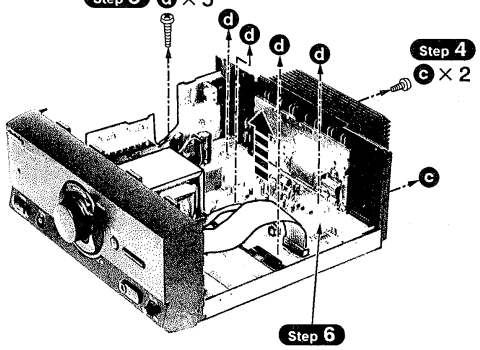

[RHD30007–K1] (Black)

[XTBS3+10JFZ1] (Black)

[XTB3+10JFZ] (Black)

[XTB3+20JFZ] (Black)

• **Check the main P.C.B. as shown below.**

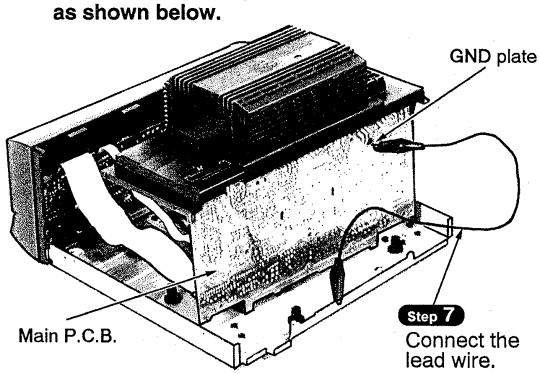

■ Main Component Replacement Procedures

1. Replacement for the power IC and regulator transistor

• Follow the item 2 (Step 1 ~ Step 6) checking procedures for each P.C.B..

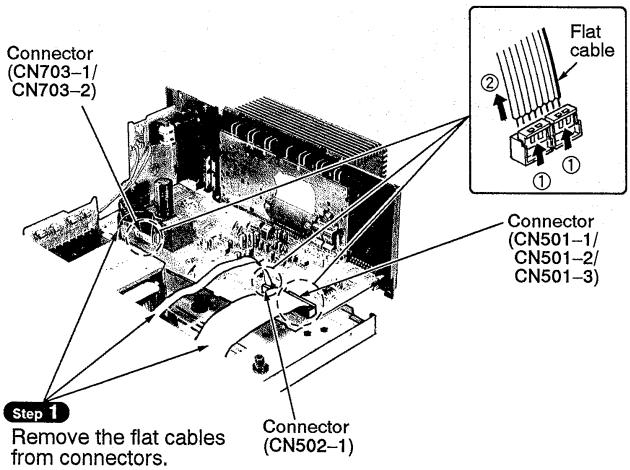

[XTW3+15T]

NOTE

When mounting the power IC or regulator transistor, apply silicone compound (RFKX0002) to the rear side of power IC or regulator transistors.

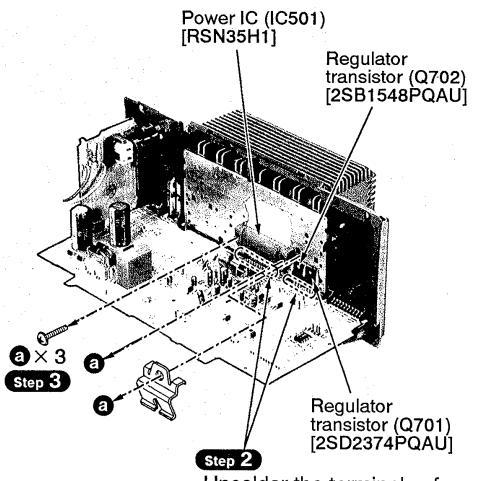
Power IC (IC501) [RSN35H1]
Regulator transistor (Q702) [2SB1548PQAU]
a × 3
Step 3
Regulator transistor (Q701) [2SD2374PQAU]
Step 2
Unsolder the terminals of power IC and regulator transistors.

■ Power Source ON/OFF of This Unit

1. Connect the AC power cord of this unit to an AC outlet and turn it on. (This unit comes to stand-by mode.)
2. Make test point TP701 short as shown in Fig. 1. This unit comes to power ON mode.

Operation Check

1. Set this unit to power ON mode.
2. Input a signal (1 kHz, 100 mV) to the section between the jumper **J603** (LINE IN for L-ch) and the jumper **J308** (LINE IN GND) as well as the section between the jumper **J604** (LINE IN R-ch) and the jumper **J308**.
3. Connect the speaker to the speaker terminals and check if it sounds from the speaker.

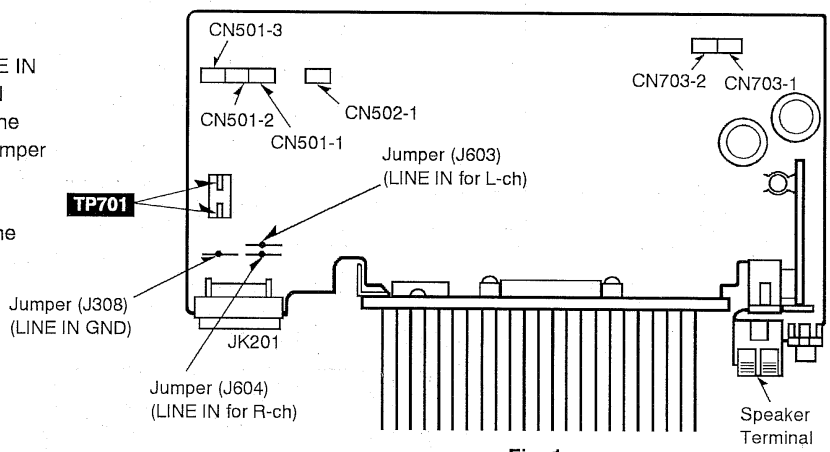

Fig. 1

■ Schematic Diagram

	Page
A OPERATION CIRCUIT	10
B MAIN CIRCUIT	10, 11
C POWER TRANSFORMER CIRCUIT	11
D AC IN TERMINAL CIRCUIT	11

- **This schematic diagram may be modified at any time with the development of new technology.**

Notes:

- **S601** : Power "STANDBY ⏻ /ON" switch (POWER STANDBY ⏻ /ON)
- **S606** : SOURCE DIRECT switch
- **S607** : EQ SPACE/FLAT switch
- **S608** : V. BASS switch
- **VR401** : Microphone volume control (MIC VOLUME)
- **VR601** : Volume control (VOL)

- Indicated voltage values are the standard values for the unit measured by the DC electronic circuit tester (high-impedance) with the chassis taken as standard. Therefore, there may exist some errors in the voltage values, depending on the internal impedance of the DC circuit tester.
  No mark: Power ON

- Important safety notice:
  Components identified by ⚠ mark have special characteristics important for safety.
  Furthermore, special parts which have purposes of fire-retardant (resistors), high-quality sound (capacitors), low-noise (resistors), etc. are used. When replacing any of components, be sure to use only manufacturer's specified parts shown in the parts list.

- **Caution!**
  IC and LSI are sensitive to static electricity.
  Secondary trouble can be prevented by taking care during repair.
  Cover the parts boxes made of plastics with aluminum foil.
  Ground the soldering iron.
  Put a conductive mat on the work table.
  Do not touch the legs of IC or LSI with the fingers directly.

- **Voltage and signal line**
  : Positive voltage line : Negative voltage line
  : Source signal Line (L-ch) : Mic signal

: Positive voltage line : Negative voltage line

A OPERATION CIRCUIT (P.C.Board:on page 13)

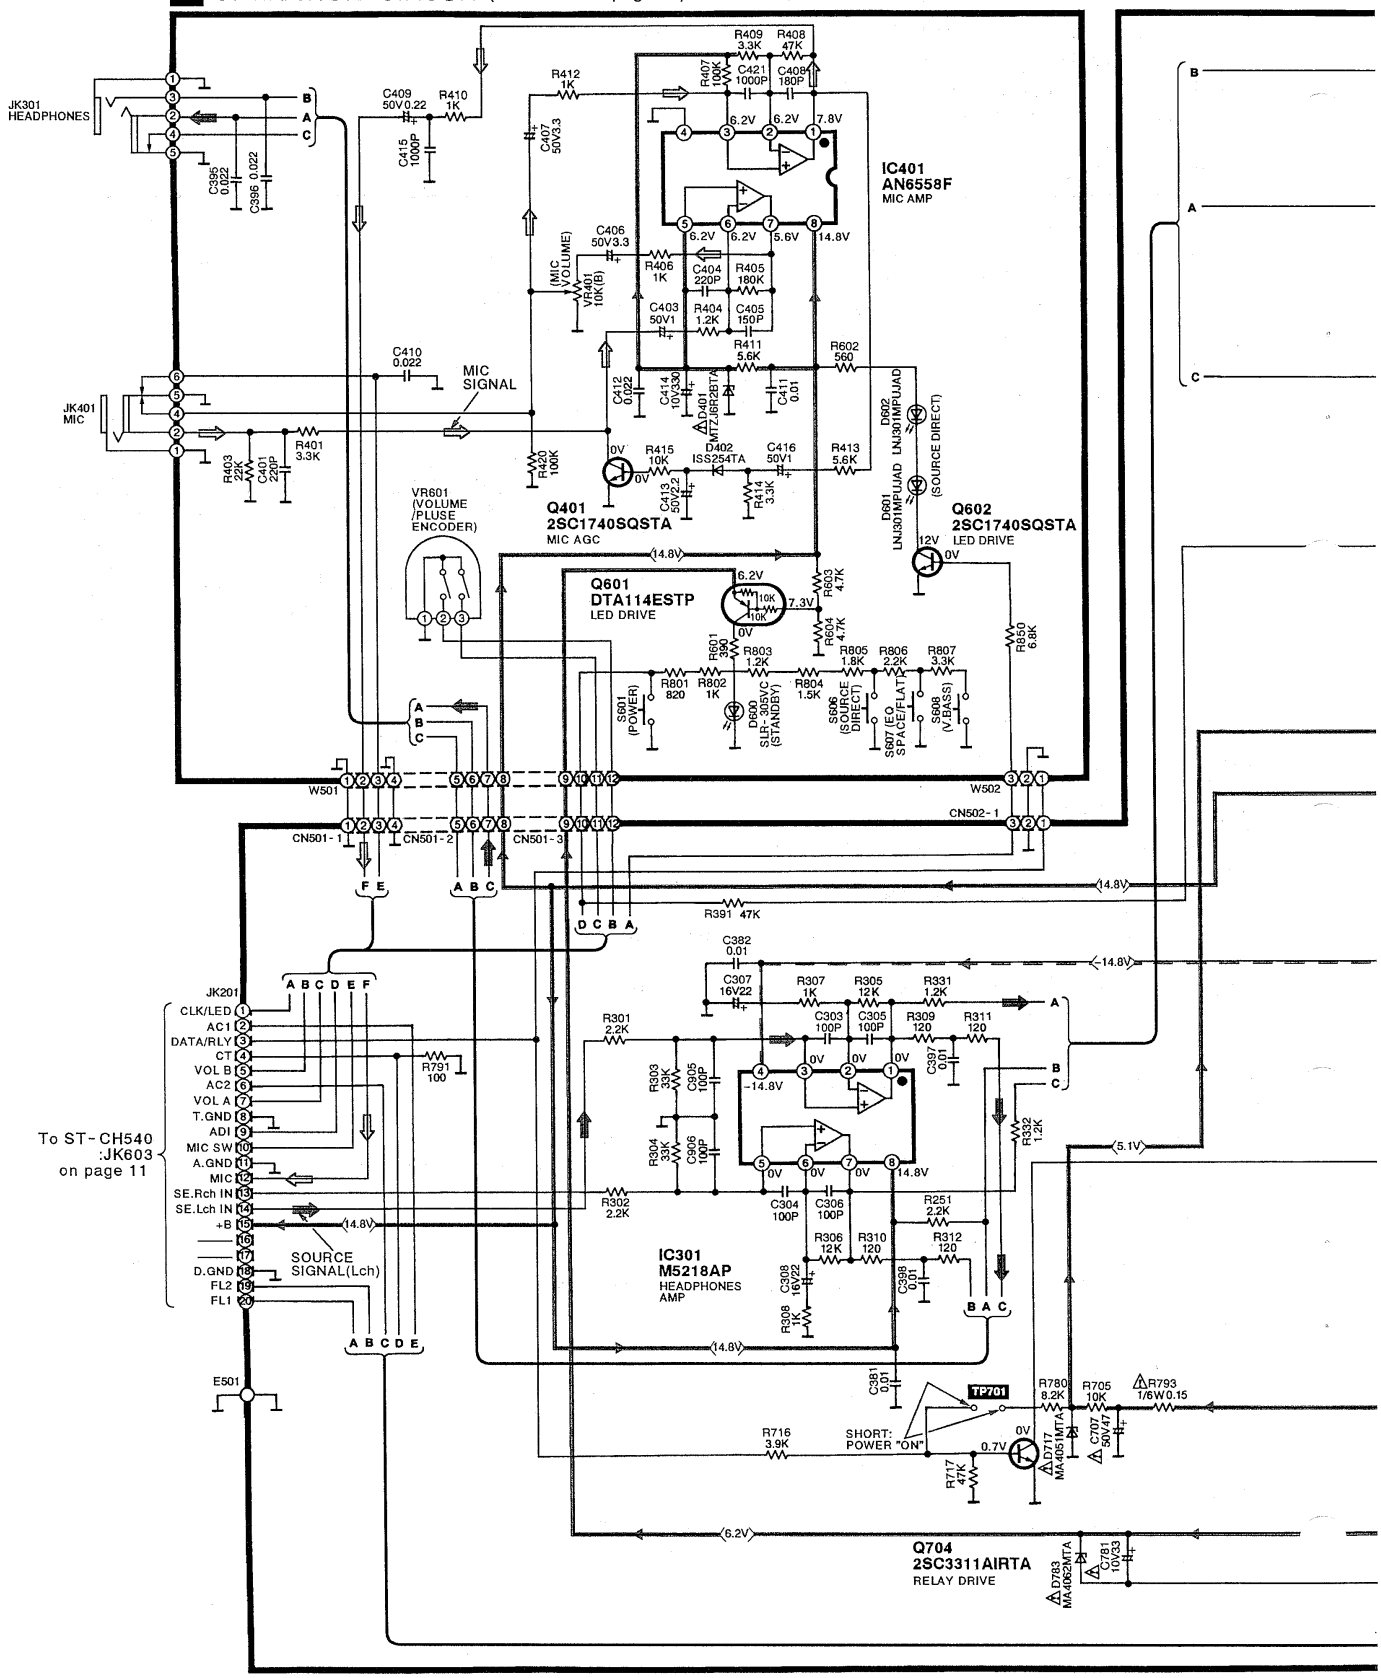

: Source signal Line (L-ch) : Mic signal

B MAIN CIRCUIT (P.C.Board:on page 12)

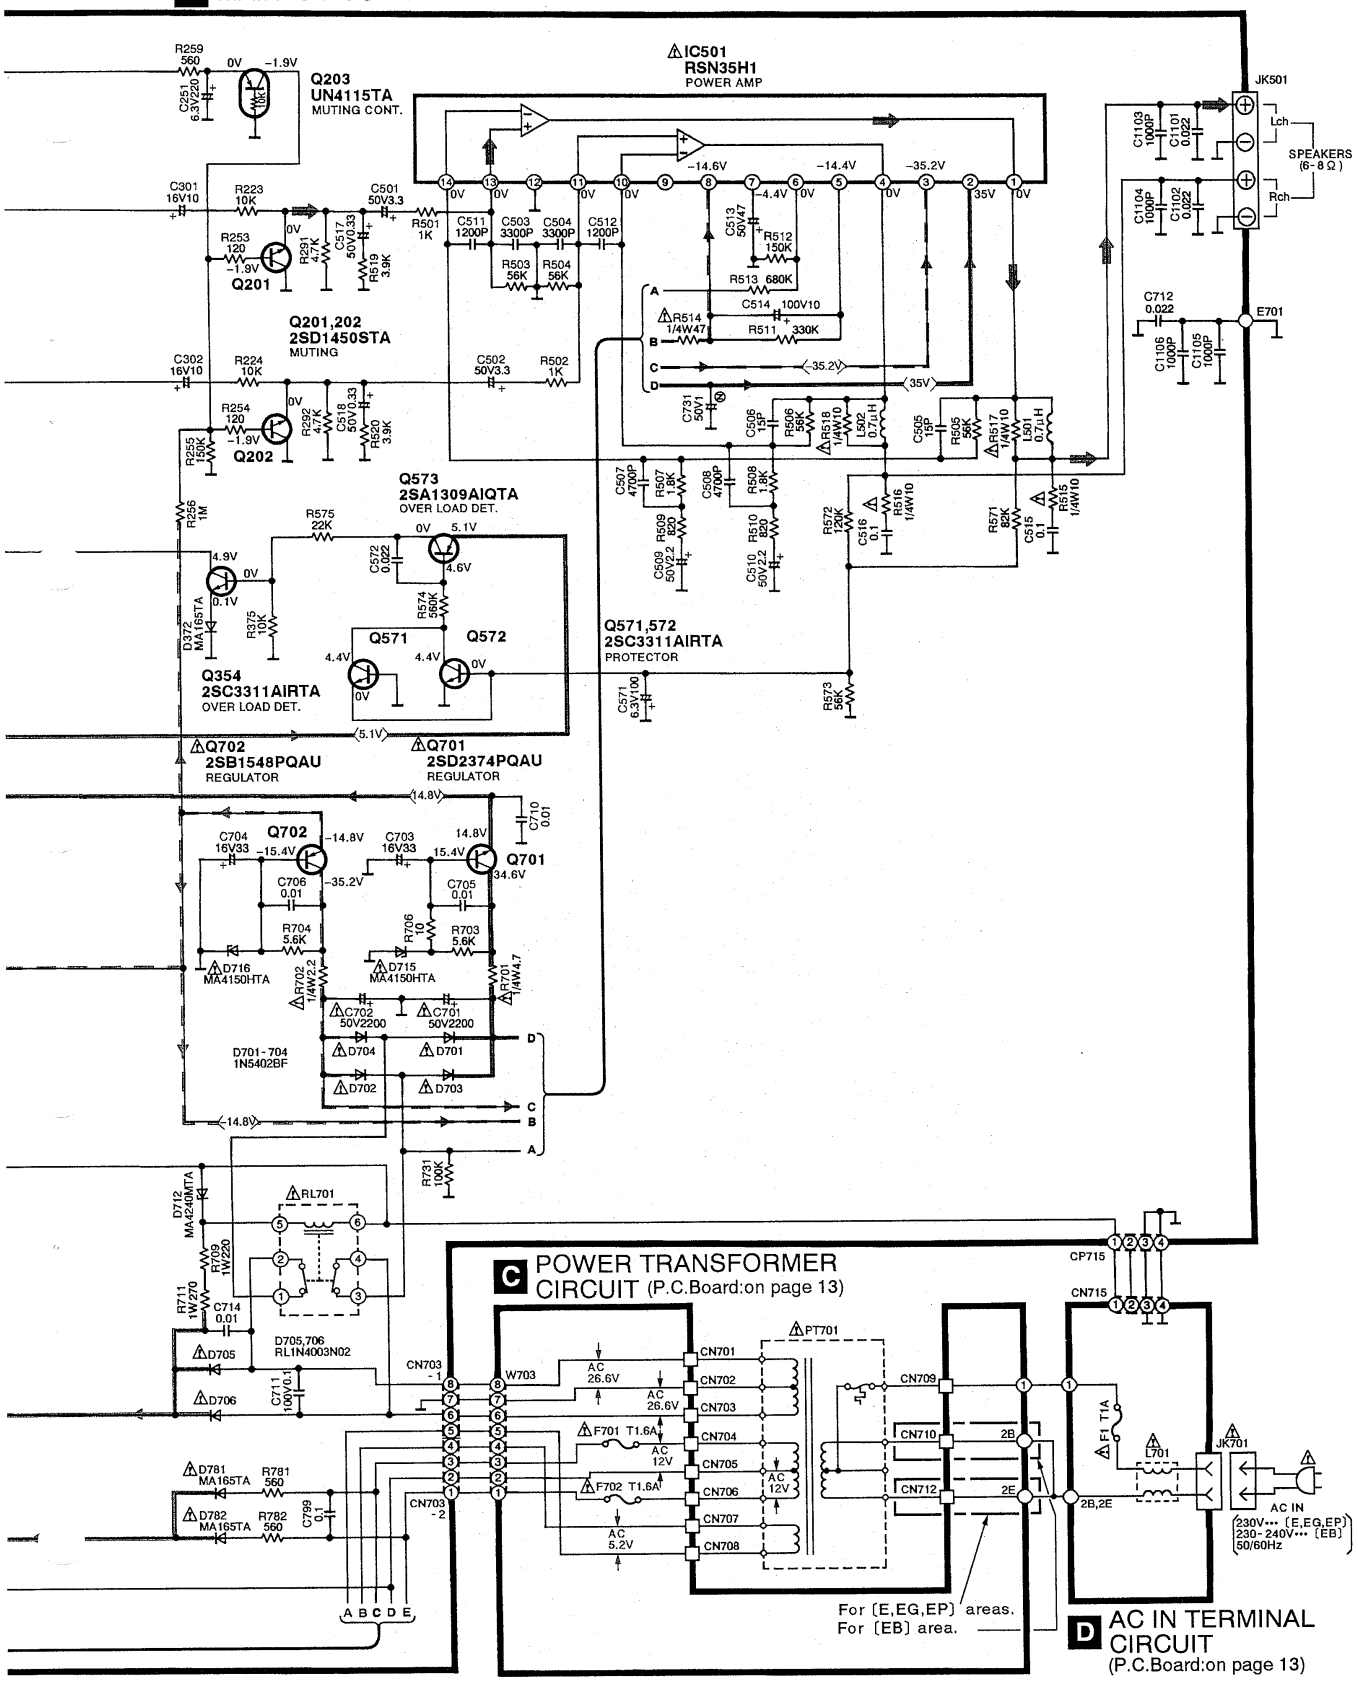

■ Printed Circuit Board Diagram

- This circuit board diagram may be modified at any time with the development of new technology.

B **MAIN P.C.B. (REP2107D–M)**

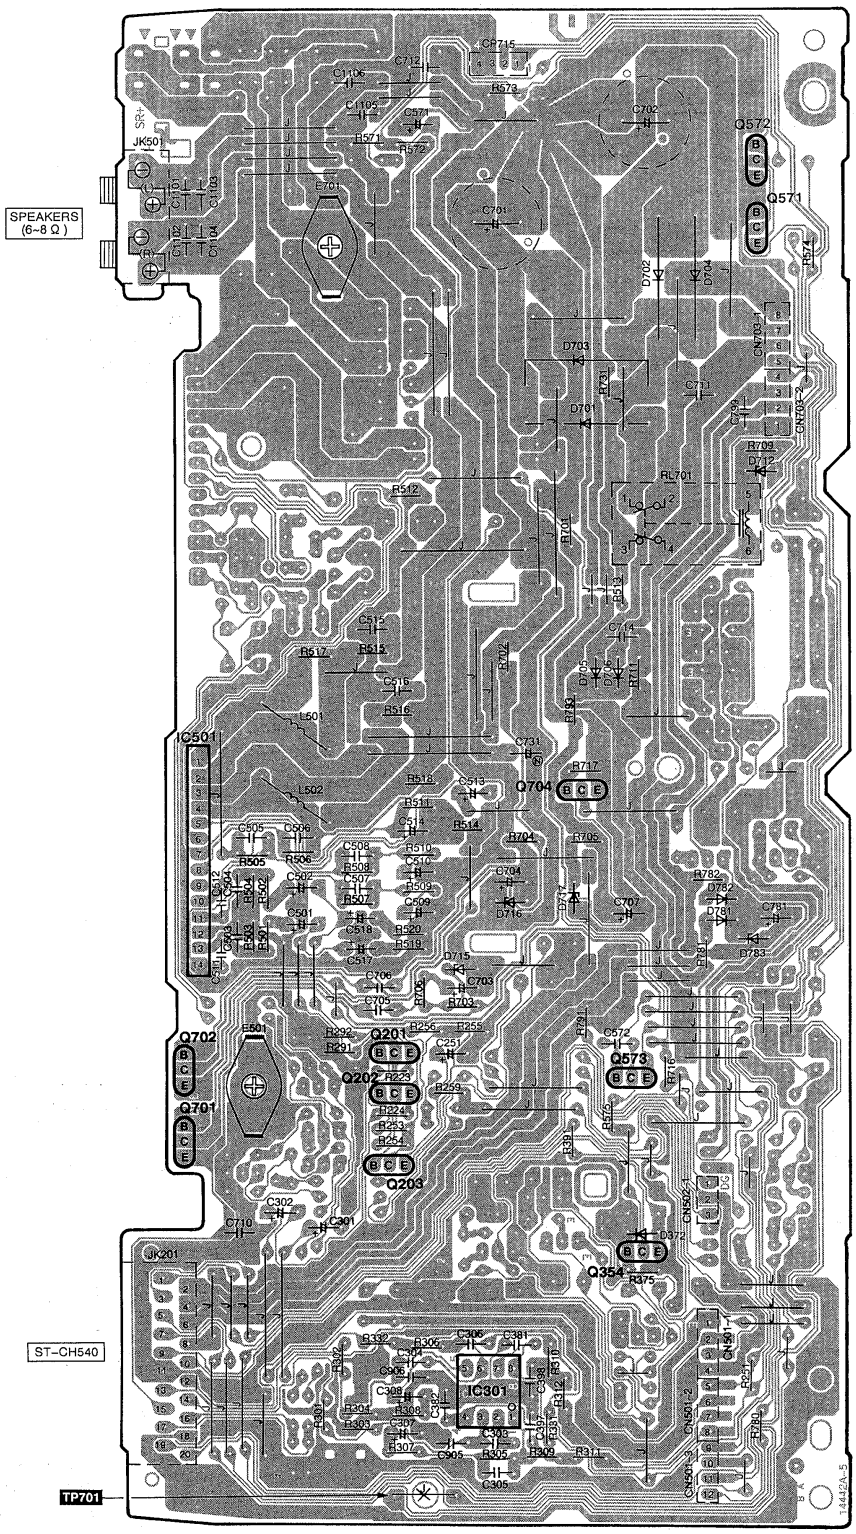

A OPERATION P.C.B. (REP2108A–S)

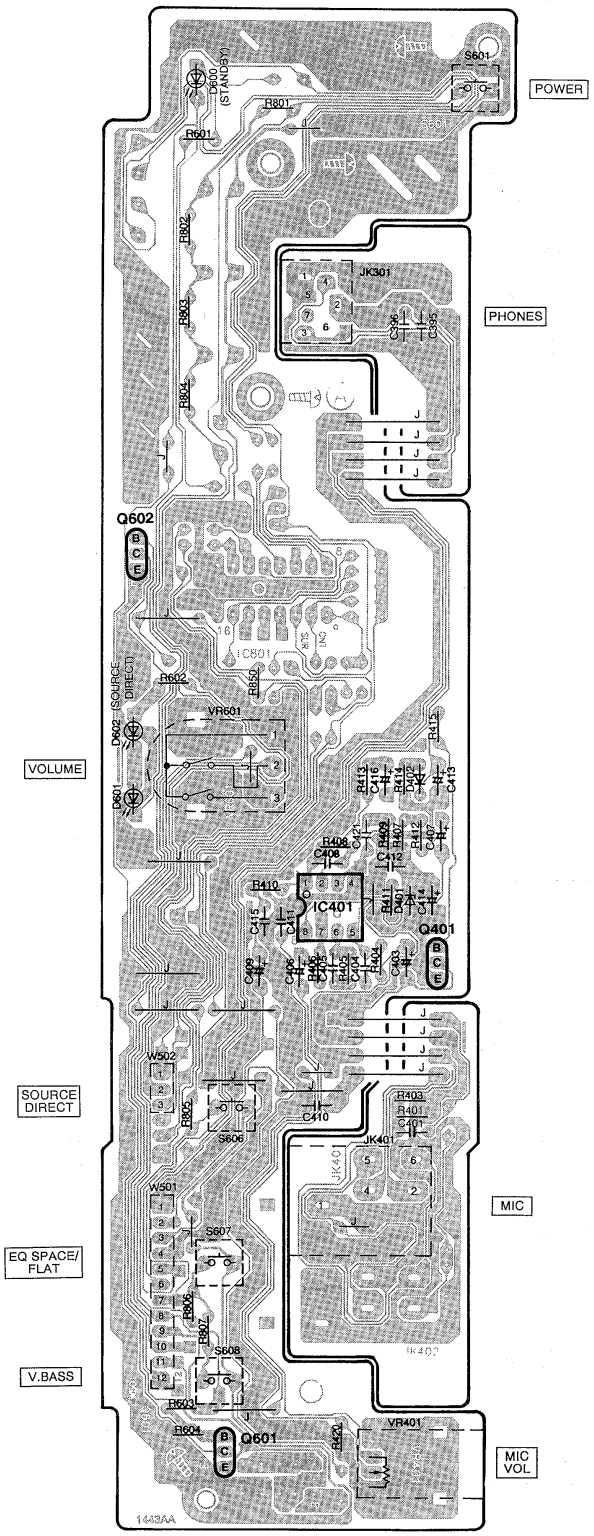

C POWER TRANSFORMER P.C.B. (REP2109A–P•••[E,EG,EP] REP2109B–P•••[EB])

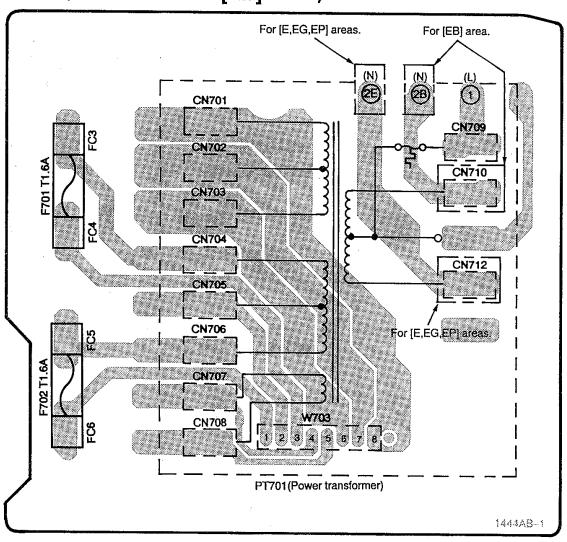

D AC IN TERMINAL P.C.B. (REP2109A–P•••[E,EG,EP] REP2109B–P•••[EB])

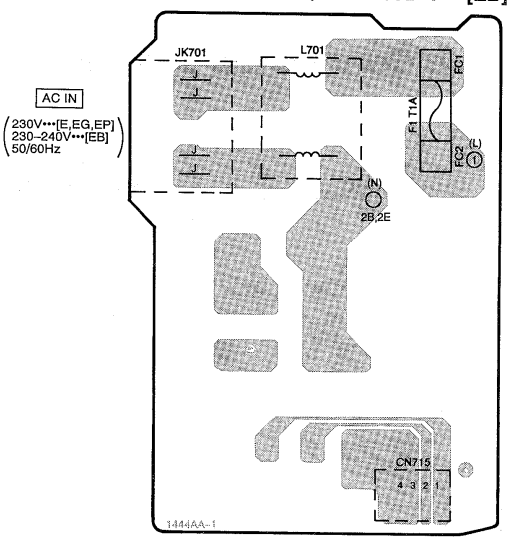

M5218AP 	RSN35H1 	AN6558F 	2SC1740SQ DTA114ESTP 	2SA1309AIQTA 2SC3311AIRTA 2SD1450RTA UN4115 
2SB1548PQAU 2SD2374PQAU 	1N5402BF RL1N4003N02 	MA4051MTA MA4062MTA 	1SS254TA MA165 	MTZJ6R2BTA 	MA4150-M MA4240H 
SLR-305VC 	LNJ301MPUJAD 				

■ Wiring Connection Diagram

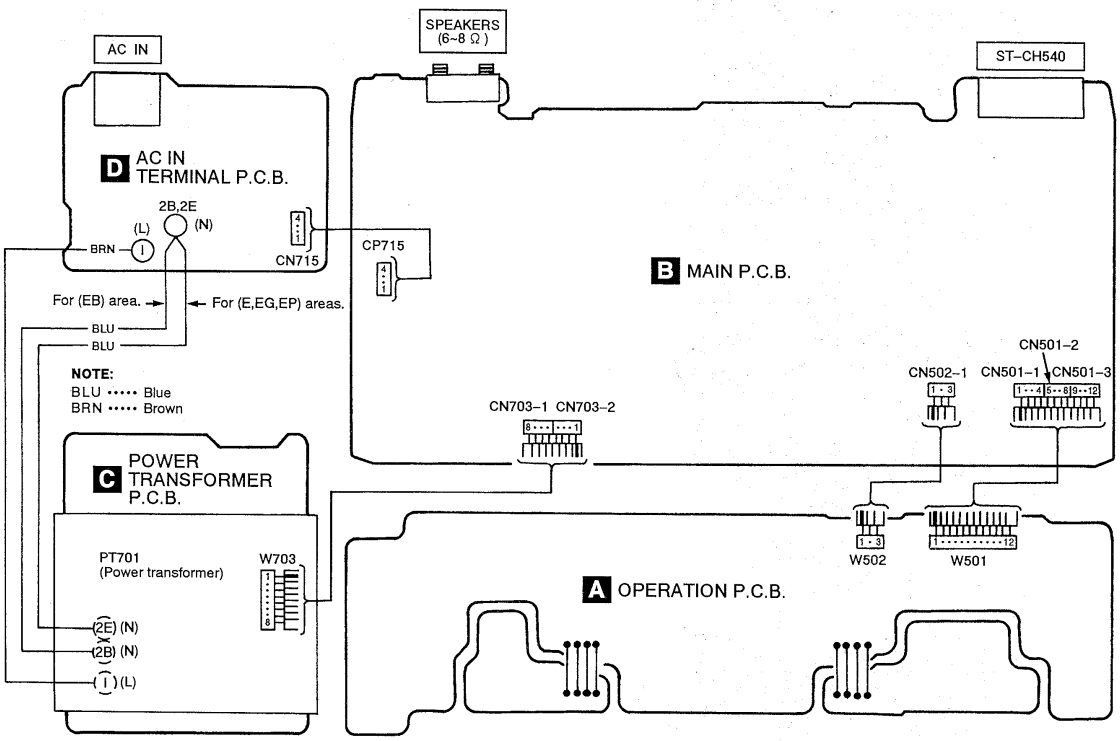

■ Block Diagram

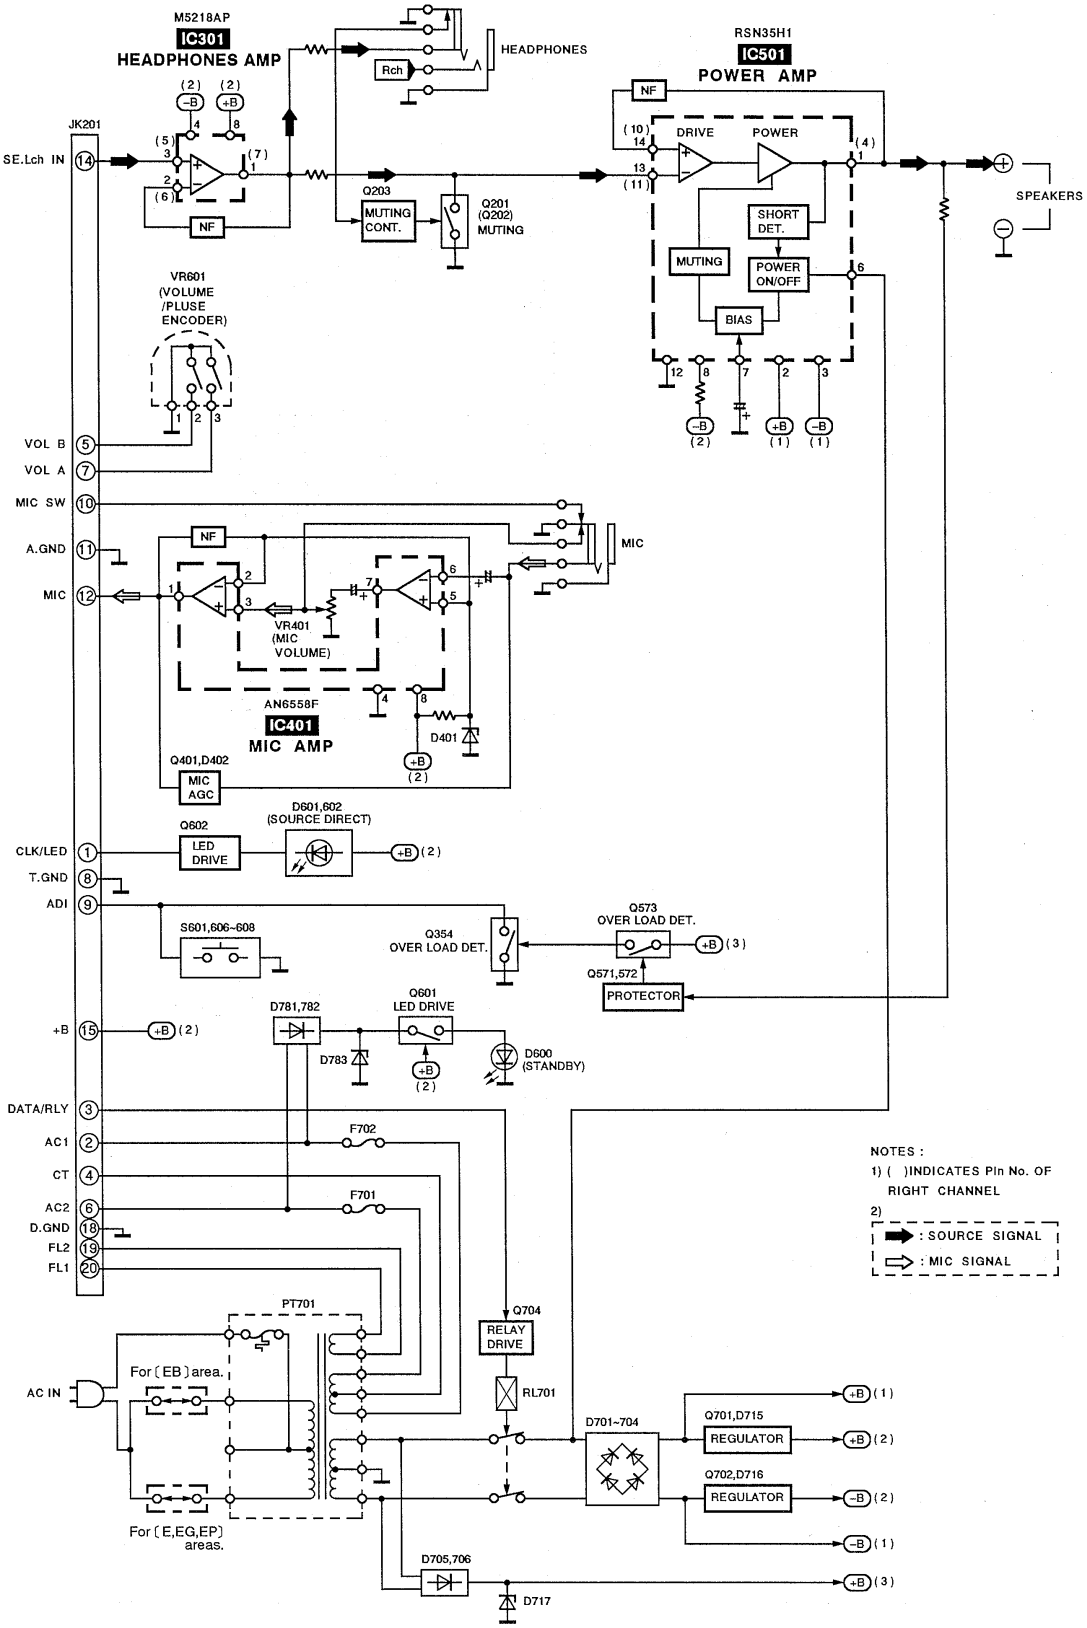

■ Replacement Parts List

Notes: *Important safety notice:
Components identified by ⚠ mark have special characteristics important for safety.
Furthermore, special parts which have purposes of fire-retardant (resistors), high-quality sound (capacitors), low-noise (resistors), etc. are used.
When replacing any of components, be sure to use only manufacture's specified parts shown in the parts list.
*The parenthesized indications in the Remarks columns specify the areas. (Refer to the cover page for area.)
Parts without these indications can be used for all areas.
*Remote Control Ass'y: Supply period for three years from termination of production.
*The "(SF)" mark denotes the standard part.

Ref. No.	Part No.	Part Name & Description	Remarks
		INTEGRATED CIRCUIT(S)	
IC301	M5218AP	IC, HEADPHONES AMP.	
IC401	AN6558F	IC, MIC AMP.	
IC501	RSN35H1	IC, POWER AMP.	⚠
		TRANSISTOR(S)	
Q201, 202	2SD1450RTA	TRANSISTOR	
Q203	UN4115	TRANSISTOR	
Q354	2SC3311AIRTA	TRANSISTOR	
Q401	2SC1740SQ	TRANSISTOR	
Q571, 572	2SC3311AIRTA	TRANSISTOR	
Q573	2SA1309AIQTA	TRANSISTOR	
Q601	DTA114ESTP	TRANSISTOR	
Q602	2SC1740SQ	TRANSISTOR	
Q701	2SD2374PQAU	TRANSISTOR	⚠
Q702	2SB1548PQAU	TRANSISTOR	⚠
Q704	2SC3311AIRTA	TRANSISTOR	
		DIODE(S)	
D372	MA165	DIODE	
D401	MTZJ6R2BTA	DIODE	⚠
D402	1SS254TA	DIODE	
D600	SLR-305VC	L. E. D.	
D601, 602	LNJ301MPUJAD	L. E. D.	
D701-704	1N5402BF	DIODE	⚠
D705, 706	RL1N4003N02	DIODE	⚠
D712	MA4240H	DIODE	
D715, 716	MA4150M	DIODE	⚠
D717	MA4051MTA	DIODE	⚠
D781, 782	MA165	DIODE	⚠
D783	MA4062MTA	DIODE	⚠
		VARIABLE RESISTOR(S)	
VR401	RRV11A01B14A	V. R, MIC VOLUME CONTROL	
VR601	EVQWWF2024B	V. R, MAIN VOLUME CONTROL	
		COIL(S)	
L501, 502	RLQYR73M	COIL	
L701	RLQZ271M	COIL	⚠
		FUSE(S)	
F1	XBA2C10TB0	FUSE, 250V T1A	⚠
F701, 702	XBA2C16TB0	FUSE, 250V T1.6A	⚠
		SWITCH(ES)	

Ref. No.	Part No.	Part Name & Description	Remarks
S601	EVQ21405R	SW, POWER	
S606	EVQ21405R	SW, SOURCE DIRECT	
S607	EVQ21405R	SW, EQ SPACE/FLAT	
S608	EVQ21405R	SW, V. BASS	
		CONNECTOR(S)	
CN501-1	RJS1A6604	CONNECTOR(4P)	
CN501-2	RJS1A6604	CONNECTOR(4P)	
CN501-3	RJS1A6604	CONNECTOR(4P)	
CN502-1	RJS1A6603	CONNECTOR(3P)	
CN703-1	RJS1A6604	CONNECTOR(4P)	
CN703-2	RJS1A6604	CONNECTOR(4P)	
CN701-709	RJS1A1101T1	CONNECTOR(1P)	
CN710	RJS1A1101T1	CONNECTOR(1P)	(EB)
CN712	RJS1A1101T1	CONNECTOR(1P)	(E, EG, EP)
CN715	RJU057W004	CONNECTOR(4P)	
CP715	RJT057W004-1	CONNECTOR(4P)	
		GND PLATE	
E501	SNE1004-2	GND PLATE	
E701	SNE1004-2	GND PLATE	
		FUSE HOLDER(S)	
FC1-6	EYF52BC	FUSE HOLDER	
		POWER TRANSFORMER	
PT701	RTP2M5B007	POWER TRANSFORMER	⚠
		RELAY	
RL701	RSY0013M-0	RELAY	⚠
		JACK(S)	
JK201	RJT065K20	SYSTEM CONNECTOR(20P)	
JK301	RJJ37TN01-C	HEADPHONES JACK	
JK401	RJJ65MA01	MIC JACK	
JK501	RJR0054M	SP TERMINAL	
JK701	SJS9236	AC INLET	⚠

Notes : * Capacity values are in microfarads (uF) unless specified otherwise, P=Pico-farads(pF) F=Farads(F)
* Resistance values are in ohms, unless specified otherwise, 1K=1,000(OHM) , 1M=1,000k(OHM)

Ref. No.	Part No.	Values & Remarks
		RESISTORS
R223, 224	ERDS2TJ103	1/4W 10K
R251	ERDS2TJ222	1/4W 2.2K
R253, 254	ERDS2EJ121	1/4W 120
R255	ERDS2TJ154	1/4W 150K
R256	ERDS2TJ105T	1/4W 1M
R259	ERDS2TJ561	1/4W 560
R291, 292	ERDS2TJ472	1/4W 4.7K
R301, 302	ERDS2TJ222	1/4W 2.2K
R303, 304	ERDS2TJ333	1/4W 33K
R305, 306	ERDS2TJ123	1/4W 12K
R307, 308	ERDS2TJ102	1/4W 1K
R309-312	ERDS2EJ121	1/4W 120
R331, 332	ERDS2TJ122	1/4W 1.2K
R375	ERDS2TJ103	1/4W 10K
R391	ERDS2TJ473	1/4W 47K
R401	ERDS2TJ332	1/4W 3.3K
R403	ERDS2TJ223	1/4W 22K
R404	ERDS2TJ122	1/4W 1.2K
R405	ERDS2TJ184T	1/4W 180K
R406	ERDS2TJ102	1/4W 1K
R407	ERDS2TJ104	1/4W 100K
R408	ERDS2TJ473	1/4W 47K
R409	ERDS2TJ332	1/4W 3.3K
R410	ERDS2TJ102	1/4W 1K
R411	ERDS2TJ562	1/4W 5.6K
R412	ERDS2TJ102	1/4W 1K
R413	ERDS2TJ562	1/4W 5.6K
R414	ERDS2TJ332	1/4W 3.3K
R415	ERDS2TJ103	1/4W 10K
R420	ERDS2TJ104	1/4W 100K
R501, 502	ERDS2TJ102	1/4W 1K
R503-506	ERDS2TJ563	1/4W 56K
R507, 508	ERDS2TJ182	1/4W 1.8K
R509, 510	ERDS2TJ821	1/4W 820
R511	ERDS2TJ334	1/4W 330K
R512	ERDS2TJ154	1/4W 150K
R513	ERDS2TJ684	1/4W 680K
R514⚠	ERD25FJ470	1/4W 47
R515, 516⚠	ERDS1FVJ100T	1/2W 10
R517, 518⚠	ERD25FVJ100T	1/4W 10
R519, 520	ERDS2TJ392T	1/4W 3.9K
R571	ERDS2TJ823T	1/4W 82K
R572	ERDS2TJ124T	1/4W 120K
R573	ERDS2TJ563	1/4W 56K
R574	ERDS2TJ564	1/4W 560K
R575	ERDS2TJ223	1/4W 22K

Ref. No.	Part No.	Values & Remarks
R601	ERDS2TJ391	1/4W 390
R602	ERDS2TJ561	1/4W 560
R603, 604	ERDS2TJ472	1/4W 4.7K
R701⚠	ERD2FCVJ4R7T	1/4W 4.7
R702⚠	ERD25FJ2R2	1/4W 2.2
R703, 704	ERDS2TJ562	1/4W 5.6K
R705	ERDS2TJ103	1/4W 10K
R706	ERDS2TJ100	1/4W 10
R709	ERG1SJ221E	1W 220
R711	ERG1SJ271E	1W 270
R716	ERDS2TJ392T	1/4W 3.9K
R717	ERDS2TJ473	1/4W 47K
R731	ERDS2TJ104	1/4W 100K
R780	ERDS2TJ822	1/4W 8.2K
R781, 782	ERDS2TJ561	1/4W 560
R791	ERDS2TJ101	1/4W 100
R793⚠	ERQ16NKWR15E	1/6W 0.15
R801	ERDS2TJ821	1/4W 820
R802	ERDS2TJ102	1/4W 1K
R803	ERDS2TJ122	1/4W 1.2K
R804	ERDS2TJ152	1/4W 1.5K
R805	ERDS2TJ182	1/4W 1.8K
R806	ERDS2TJ222	1/4W 2.2K
R807	ERDS2TJ332	1/4W 3.3K
R850	ERDS2TJ682T	1/4W 6.8K
		CAPACITORS
C251	ECEA0JKA221B	6.3V 220U
C301, 302	RCE1CKA100BG	16V 10U
C303-306	ECBT1H101KB5	50V 100P
C307, 308	ECEA1CKA220B	16V 22U
C381, 382	ECBT1E103ZF	25V 0.01U
C395, 396	ECBT1E223ZF	25V 0.022U
C397, 398	ECBT1E103ZF	25V 0.01U
C401	ECBT1H221KB5	50V 220P
C403	ECEA1HKA010B	50V 1U
C404	ECBT1H221KB5	50V 220P
C405	ECBT1H151KB5	50V 150P
C406, 407	RCE1HKA3R3BG	50V 3.3U
C408	ECBT1H181KB5	50V 180P
C409	ECEA1HKAR22B	50V 0.22U
C410	ECBT1E223ZF	25V 0.022U
C411	ECBT1E103ZF	25V 0.01U
C412	ECBT1E223ZF	25V 0.022U
C413	ECEA1HKA2R2B	50V 2.2U
C414	ECEA1AU331	10V 330U
C415	ECBT1H102KB5	50V 1000P
C416	ECEA1HKA010B	50V 1U

Ref. No.	Part No.	Values & Remarks
C421	ECBT1H102KB5	50V 1000P
C501, 502	ECA1HAP3R3B	50V 3.3U
C503, 504	ECBT1C332KR5	16V 3300P
C505, 506	ECBT1H150J5	50V 15P
C507, 508	ECBT1C472KR5	16V 4700P
C509, 510	ECEA1HKA2R2B	50V 2.2U
C511, 512	ECBT1C122KR5	16V 1200P
C513	ECA1HM470B	50V 47U
C514	ECA2AAP100B	100V 10U
C515, 516	ECFR1H104ZF	50V 0.1U
C517, 518	ECEA1HKAR33B	50V 0.33U
C571	ECEA0JKA101B	6.3V 100U
C572	ECBT1E223ZF	25V 0.022U
C701, 702⚠	ECA1HM222B	50V 2200U
C703, 704	ECEA1CKA330B	16V 33U
C705, 706	ECKR1H103ZF5	50V 0.01U
C707⚠	ECA1HM470B	50V 47U
C710	ECBT1E103ZF	25V 0.01U
C711	ECQE1104KF3	100V 0.1U
C712	ECBT1E223ZF	25V 0.022U
C714	ECKR1H103ZF5	50V 0.01U
C731	ECEA1HKN010B	50V 1U
C781⚠	RCE1AKA330BG	10V 33U
C799	ECBT1H104ZF5	50V 0.1U
C905, 906	ECBT1H101KB5	50V 100P
C1101, 1102	ECBT1E223ZF	25V 0.022U
C1103-1106	ECBT1H102KB5	50V 1000P

Note: The reference number SA represent the grease and tool used for this unit.

Ref. No.	Part No.	Part Name & Description	Remarks
		CABINET PARTS	
1	RKM0202A-K	TOP CABINET	
2	RHD30007-K1	SCREW	
3	XTBS3+10JFZ1	SCREW	
4	RFKJECA7-N	BOTTOM CHASSIS ASS'Y	
4-1	RKA0011-3	FOOT	
5	RKF0429C-K	REAR PANEL	(E, EG, EP)
5	RFKHECH540EB	REAR PANEL ASS'Y	(EB)
6	RKQ0089	SPACER	
7	RMC0158	HOLDER	
8	RFKGECH540EK	FRONT PANEL ASS'Y	
9	RGL0282-Q	PANEL LIGHT	
10	RGL0292-Q	PANEL LIGHT	
11	RGU1224-K	BUTTON, POWER	
12	RGU1225-K	BUTTON, OPERATION	
13	RGW0207-1K	KNOB, MAIN	
14	RGW0235-K	KNOB, MIC	
15	RHD26016	SCREW	
16	RMN0329-J	HOLDER	
17	SNE4021-1	NUT	
18	XTBS26+10J	SCREW	
19	XTBS3+8JFZ1	SCREW	
20	XTB3+10JFZ	SCREW	
21	XTB3+12JFZ	SCREW	
22	XTB3+20JFZ	SCREW	
23	XTB3+8JFZ	SCREW	
24	XTW3+15T	SCREW	
25	RMN0191	HOLDER	
26	RWJ1808130XX	FLAT CABLE (8P) (W703)	
27	RWJ1812220QC	FLAT CABLE (12P) (W501)	
28	RWJ1803200QC	FLAT CABLE (3P) (W502)	
		PACKING MATERIALS	
P1	RPG3125	PACKING CASE (SYSTEM)	
P2	RPG2708	PACKING CASE (CD/TUNER)	
P3	RPG2707	PACKING CASE (DECK)	
P4	RPG2706	PACKING CASE (AMPLIFIER)	
P5	RPN0893	PAD (CD/TUNER)	
P6	RPN0892	PAD (DECK)	
P7	RPN0891	PAD (AMPLIFIER)	
P8	SPP740	PROTECTION COVER	
P9	RPF0139	PROTECTION COVER	
P10	RPQ0522	SPACER	
P11	RPQ0541	SPACER	
P12	RPQ0664	SPACER	

Ref. No.	Part No.	Part Name & Description	Remarks
		ACCESSORIES	
A1	RAK-CH204WH	REMOTE CONTROL TRANSMITTER	
A1-1	RKK0057-K	BATTERY COVER	
A2	REE0499	SPEAKER CORD (2000 mm)	
A3	REX0608	FLAT CABLE (SHORT)	
A4	REX0660	FLAT CABLE (MEDIUM)	
A5	REX0661	FLAT CABLE (LONG)	
A6	RJA0019-2K	AC MAINS LEAD	⚠ (SF) (E, EG, EP)
A6	RJA0049-K	AC MAINS LEAD	⚠ (EB)
A7	RFKSECH570EK	INSTRUCTION MANUAL ASS'Y	(E)
A7	RFKSECH570EB	INSTRUCTION MANUAL ASS'Y	(EB)
A7	RQT3481-D	INSTRUCTION MANUAL	(EG)
A7	RQT3496-Q	INSTRUCTION MANUAL	(EP)
A8	RQA0117	WARRANTY CARD	(E, EG, EP)
A9	RQCB0169	SERVICE CENTER LIST	(E, EG, EP)
A10	RSA0012	AM LOOP ANTENNA	
A10-1	RMN0244	ANTENNA HOLDER	
A10-2	XTN3+12AFZ	SCREW	
A11	RSA0007	FM INDOOR ANTENNA	
A12	SJP9009	ATTACHMENT PLUG	(EB)
		GREASE OR JIG/TOOL	
SA1	RFKX0002	COMPOUND GREASE	

■ Cabinet Parts Location

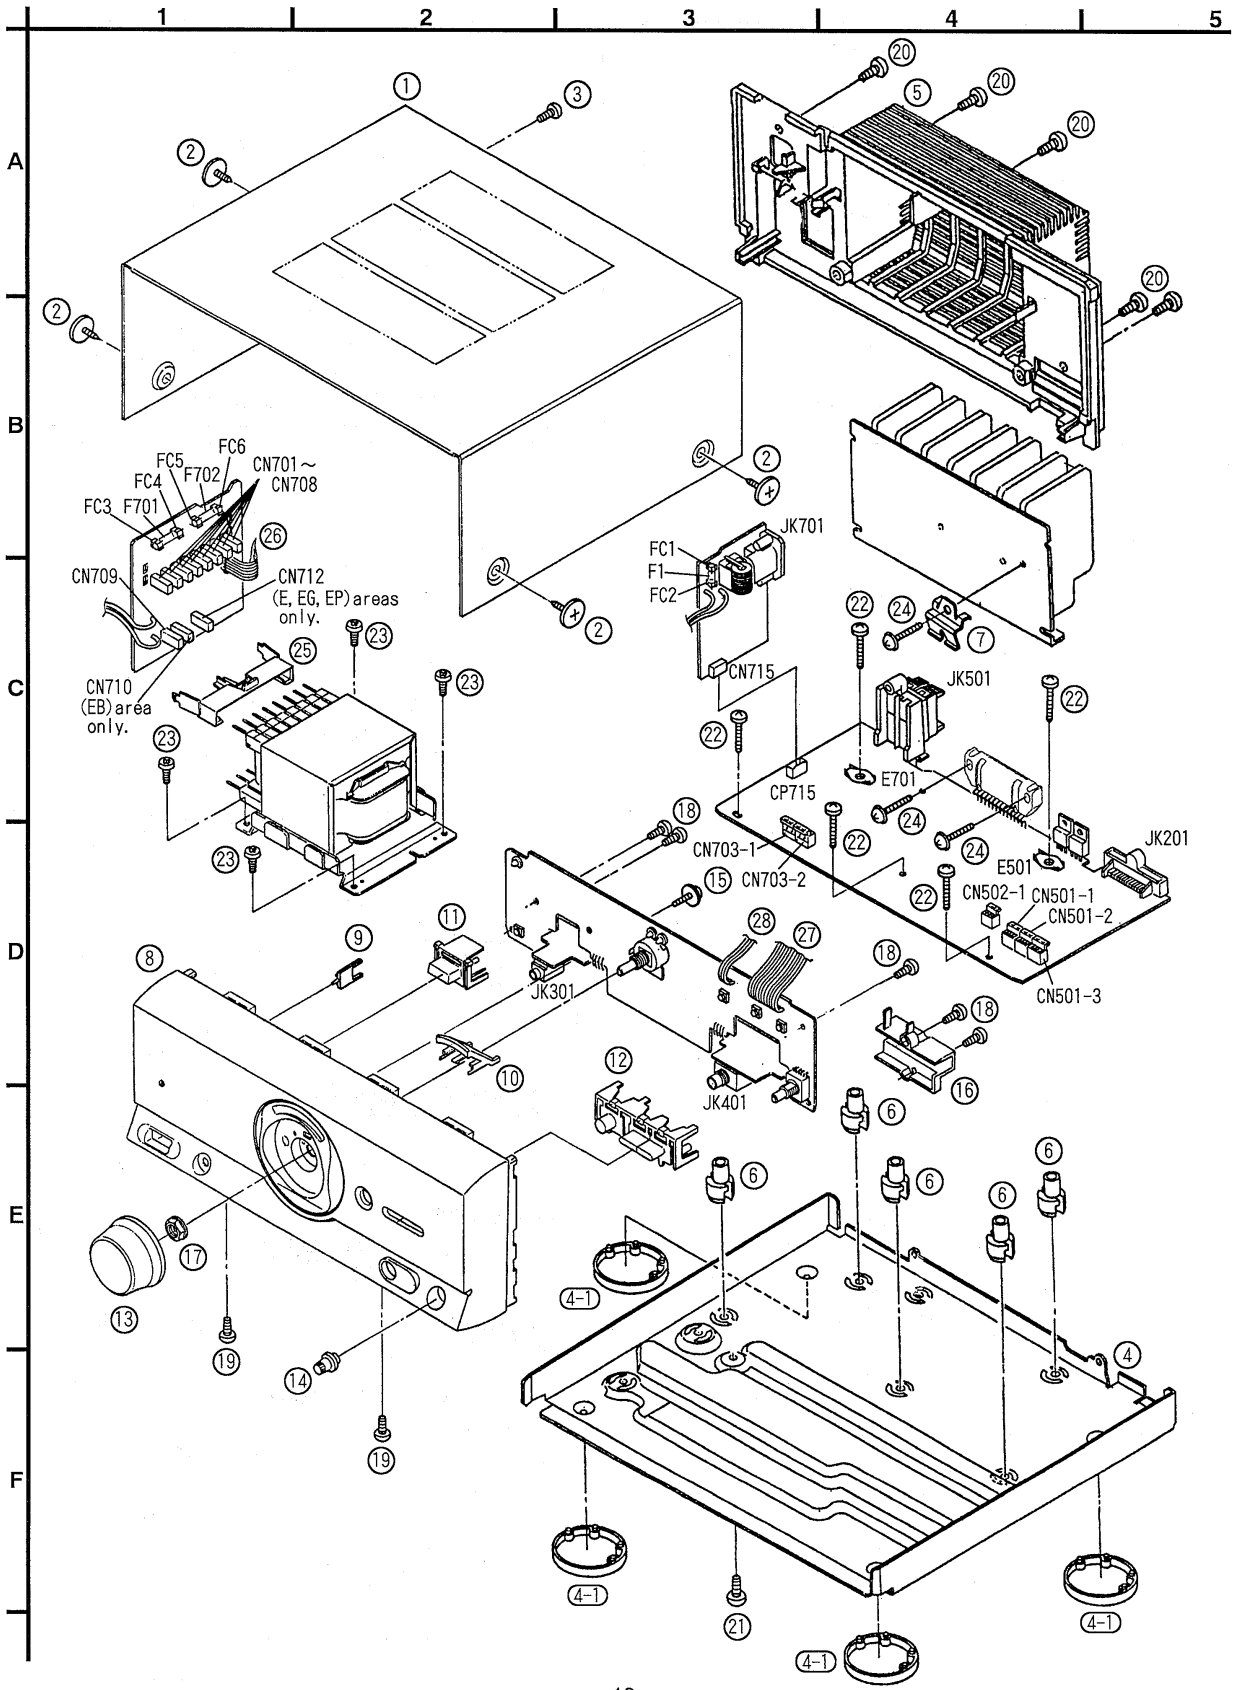

■ Packaging

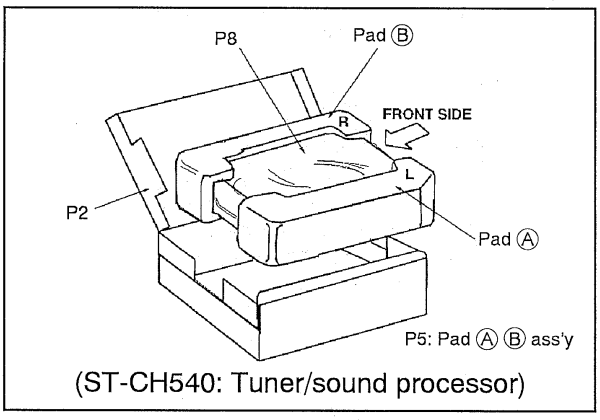

(ST-CH540: Tuner/sound processor)

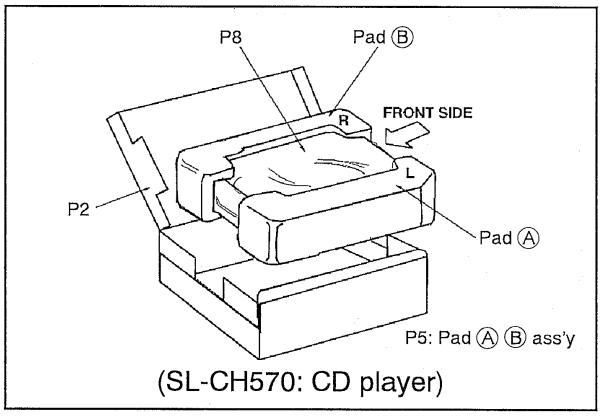

(SL-CH570: CD player)

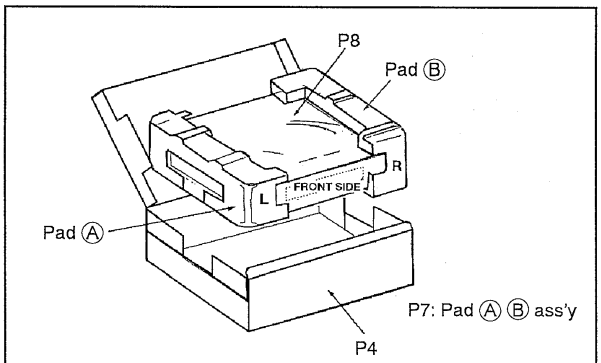

(SE-CH540: Amplifier)

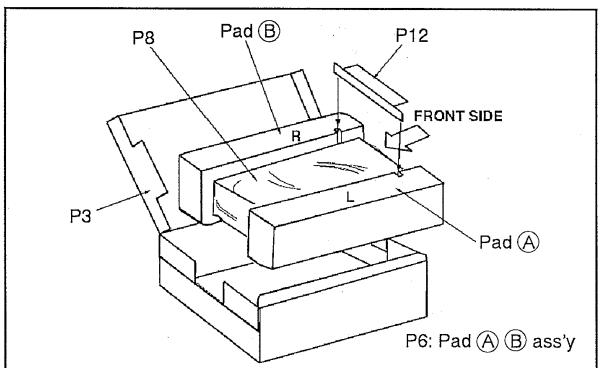

(RS-CH770: Cassette deck)

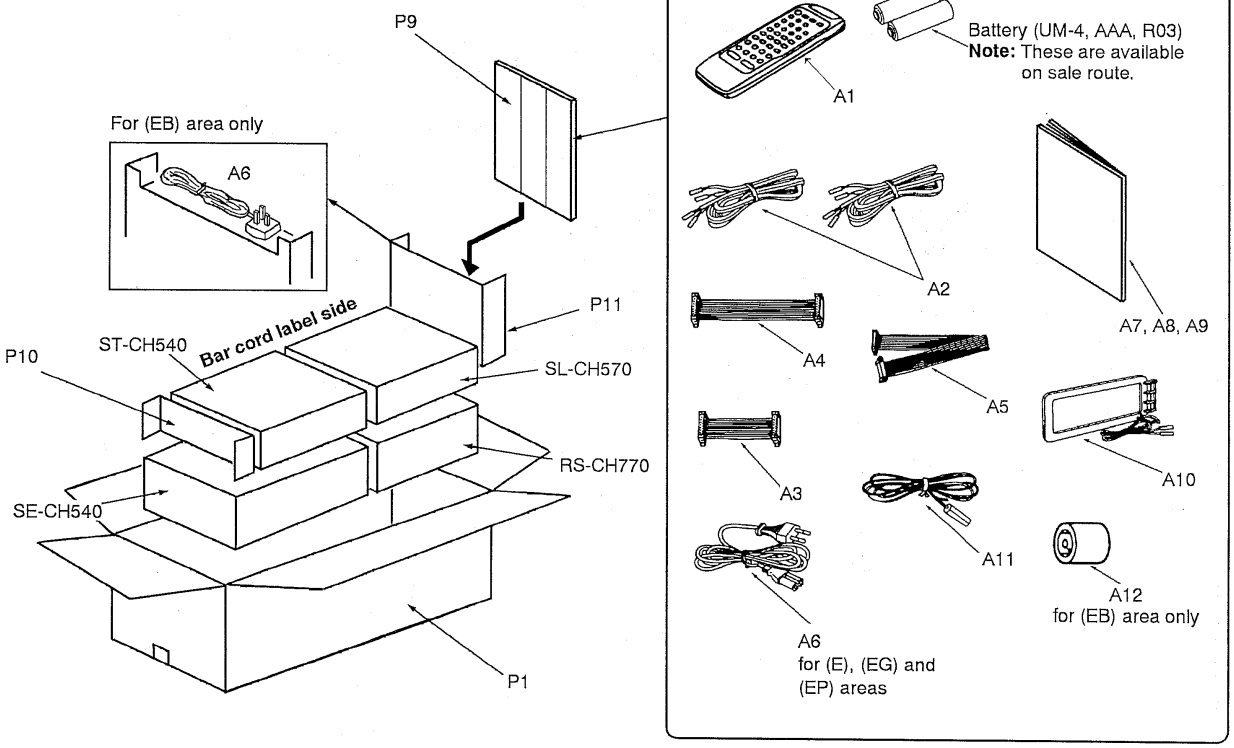

Printed in Japan
F960407650 HH/TW